



The  
**Patent  
Office**

EH315298425US



INVESTOR IN PEOPLE  
The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP9 1RH



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Andrew Gervy*

Dated 14 JAN 1999

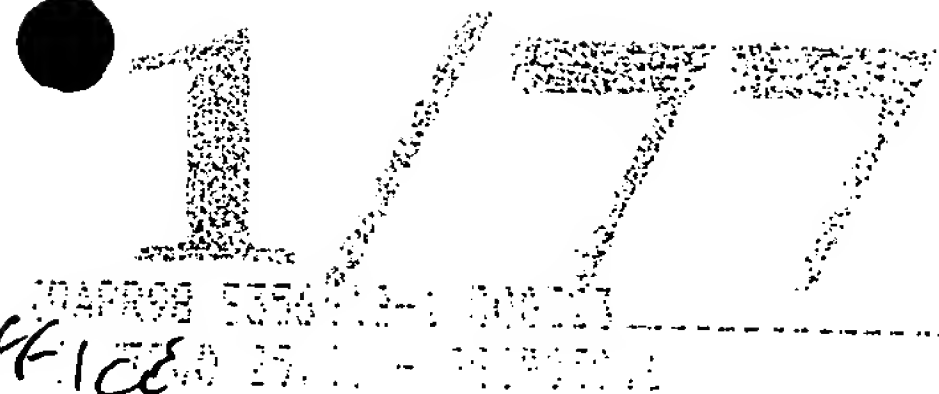

THE PATENT OFFICE

29 APR 1998

RECEIVED BY POST

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference Folio 17924 DCS

2. Patent application number  
(The Patent Office will fill in this part) 29 APR 1998 9809030.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)  
Black & Decker Inc  
Drummond Plaza Office Park  
1423 Kirkwood Highway  
Newark, Delaware 19711  
USA  
Patents ADP number (if you know it) 341214001  
If the applicant is a corporate body, give the country/state of its incorporation Delaware, USA

4. Title of the invention  
POWERED OSCILLATING HAND TOOL

5. Name of your agent (if you have one)  
DIANA C STAGG  
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
Emhart Patents Department  
Emhart International Ltd  
177 Walsall Road  
Birmingham B42 1BP  
United Kingdom  
Patents ADP number (if you know it) 5713904002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
-	-	-	-

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)
-	-	-

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)) Yes

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 6

Claim(s) 1

Abstract 1

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) -

Any other documents Fee sheet  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Diana C. O'Leary

Date

28.4.98

12. Name and daytime telephone number of person to contact in the United Kingdom

0121 331 2556


## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Patents Form 7/77

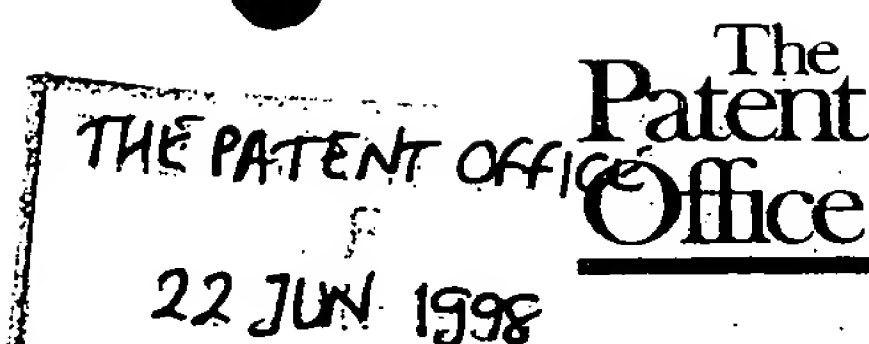Pat. Act 1977  
(Rule 15)Statement of inventorship and of  
right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference Folio 17924 DCS
2. Patent application number 9809030.1  
(if you know it)
3. Full name of the or of each applicant Black & Decker Inc
4. Title of the invention POWERED OSCILLATING HAND TOOL
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent By virtue of an assignment from the inventor to Black & Decker Inc dated 16 June 1998
6. How many, if any, additional Patents Forms 7/77 are attached to this form?  
(see note (c))
7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.  

Signature David Cragg
Date 19.6.98
8. Name and daytime telephone number of person to contact in the United Kingdom 0121 331 2556

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

096-RL-16

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

COLIN <u>DUFFY</u>  24 West Terrace Spennymoor County Durham DL16 7BW United Kingdom
Patents ADP number (if you know it): 3959814002

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder  
Have you signed the form?

## POWERED OSCILLATING HAND TOOL

The present invention relates to a powered oscillating hand tool, in particular a powered oscillating hand tool comprising a drive unit having an electric motor with a drive shaft to which a sander head can be attached.

In conventional sanders of the orbital type, with a shaped shoe, the drive system comprises an eccentric which is restrained so that the sander shoe cannot spin independently of the motor and it therefore describes a regular orbit. The shoes of such sanders are available in a range of shapes and such sanders are in general used for the removal of relatively small quantities of material, for example for detailed work or for finishing. The base of the shoe may be provided with a surface, in particular a hook and loop surface, on which an abrasive sheet may be mounted.

European Patent No 610 801 describes a sander which carries a triangular shoe which can be detached from the body of the sander by means of an operating button located at the front corner of the sander. The operating button carries a bolt which is resiliently mounted on the tool and is biased towards engagement under a catch hook provided in the triangular shoe. The sander is further provided, on the edge opposite the operating button, with at least one engagement opening for engaging at least one support claw provided on the triangular shoe.

It is a disadvantage of such an arrangement that it is expensive to manufacture and may be difficult to operate to attach and detach the shoe, in particular under the conditions in which the sander is likely to be used.

It is an object of the present invention to provide a sander in which the above disadvantages are reduced or substantially obviated.

- 5       The present invention therefore provides a powered oscillating hand tool comprising
- (a) a drive unit having an electric motor and a drive shaft;
  - (b) a bearing mounted on the drive shaft and located
  - 10 radially eccentrically relative to the drive shaft;
  - (c) a second drive shaft mounted on the eccentric bearing;
  - (d) a carrier plate mounted on the second drive shaft and
  - 15 (e) a platen for mounting on the carrier plate characterised in that the carrier plate is provided with a first engagement means and the platen is provided with second engagement means to engage with the first engagement means by rotation of the platen relative to the carrier
  - 20 plate.

The first and second engagement means preferably together form a bayonet fitting, more preferably a bayonet fitting of the type in which the first engagement means

25 (provided on the carrier) is in the form of one or more apertures and the second engagement means is in the form of one or more hook members.

An embodiment of a powered oscillating hand tool

30 according to the invention will now be described with reference to the accompanying drawings in which

Figure 1 is a side view, in section of a preferred embodiment of a powered oscillating hand tool according to the invention, with a platen attached;

35



Figure 2 is a perspective view of the carrier plate of Figure 1, viewed from above, and

Figure 3 is a perspective view of the platen of Figure 1, viewed from above.

5

Figure 1 shows a sanding device (10) comprising a drive unit (2) including an electric motor (4) located in a housing (6) and a drive shaft (8). A fan (12) mounted on shaft (8) is arranged to draw air in from mouth (14) of a carrier plate (16) permanently mounted to the sanding device (10) and direct it through extractor duct (18) to exhaust outlet (20). A nut is used to secure the carrier plate (16) (see Figure 2) to a second drive shaft (24) which is housed in the fan (12) by bearing (26) which is eccentrically located radially in respect to shaft (8).

Three flexible columns (28) made of rubber are arranged around the drive shaft (8). The upper end (30) of each of the flexible columns (28) is held in the housing (6) and the lower end (32) is located in a recess (34) provided in the carrier plate (16).

A platen (36) is detachably mounted on the carrier plate (16), as will be described in more detail with reference to Figures 2, 3 and 4.

The platen (36) is driven by the electric motor (4) through shafts (8,24). A perforated sandpaper sheet (not shown) may be attached to the outer face (38) of the platen (36), for example by the use of hook-and-loop fabric such as that sold as VELCRO (RTM) glued to face (38). Holes (40) passing through the platen (36) facilitate the removal of dust etc., from the sanding face through the platen (36) to exhaust outlet (20) via the duct (18). An extractor hose (not shown) may be attached to the exhaust outlet (20).



As can be seen from Figure 2, the carrier plate (16) is made from a plastics material, for example glass filled nylon and carries on its underside a plurality of strengthening ribs (not shown). The carrier plate (16) includes three recesses (34) which are used to couple the carrier plate (16) to the sanding device (10) by means of the flexible columns (28) which locate in the recesses (34) in known manner. The centre of the carrier plate (16) has a boss (42) which is used to accept the eccentrically mounted second drive shaft (24).

The carrier plate (16) has a plurality of holes (44) formed therein and spaced at  $120^\circ$  around the central boss (42). The holes (44) are formed so that each can accept one of a plurality of projections formed on the platen (36) which will be described in more detail below. The holes (44) are shaped so as to provide an area of relatively large cross sectional area which narrows down to a strip of narrow width. Flanking each hole (44) and extending substantially along the length from the relatively large cross-sectional area to the end of the relatively narrow strip is a further hole (46). These holes (46) are formed so as to allow the piece of plastics material (48) from which the carrier plate (16) is formed and which is situated between the holes (44) and (46) to act as a spring mechanism. The hole (44) is shaped so that an inwardly projecting piece (50) of the plastics material of the carrier plate (16) is formed at the position shown.

It will also be seen from Figure 2 that each hole (44) is associated with a vertically displaced cover member (52).

The platen (36) is provided with a plurality of projections (54) projecting from the inner face of the platen (36). In order to mount the platen (36) on the

carrier plate (16) the platen (36) is oriented such that projections (54) are situated directly below each of the holes (44). The platen (36) is then urged toward the carrier plate (16) so that the projections (54) protrude  
5 through their respective holes (44). As can be seen from the relative orientation of each of the projections (54) and holes (44), when the platen (36) is rotated by approximately 24° then the outer peripheral shapes of the platen (36) and carrier plate (16) coincide and also the projections (54)  
10 are rotated about the boss (42) such that they are held within the holes (44) by way of the projection (50) acting as a detent and also the strip of material (48) of the carrier plate (16) between the holes (44) and (46) acting as a spring urging this detent into engagement with each  
15 projection (54). As can be seen in particular from Figures 3 and 4, each projection (54) has a portion (56) formed as a flat face. When the platen (36) and carrier plate (16) are rotated so as to be locked together as described above, this portion (56) lies flat against a face (58) of the carrier  
20 plate (16). This is necessary so that the majority of the oscillating driving force is imparted to platen (36) by the carrier plate (16) through these flat and abutting faces (56), (58). The platen (36) is retained from separating and therefore falling off the carrier plate (16) by way of hook  
25 (60) shown in Figure 3 co-operating with the cover member (52). As has been described above, the cover member (52) is situated in a plane which is vertically displaced from the plane of the carrier plate (16) and standing proud thereof. The hook (60) therefore sits between the cover member (52)  
30 and the plane of the carrier plate (16) and in this way the cover member (52) acts as a catch for the hook (60).

In order to prevent the tip portion of the platen (36) coming away from the carrier plate (16) the platen (36)  
35 carries a first ramp surface (62) as shown in Figure 3,

which ramp surface (62) co-operates with a second ramp surface (64) in the carrier plate (16). It will be understood that the coupling mechanism between the first ramp surface (62) and second ramp surface (64) operates to engage the two surfaces, when the platen is rotated to engage the projection (54) and its hook (60).

One more alternative platen (36) can be provided, for use in different sanding operations, such as for detail sanding, sanding louvres, where the platen is provided with a finger extension and contour sanding.

15

20

25

30

35

## CLAIMS

- 1     A powered oscillating hand tool (10) comprising  
      (a)   a drive unit (2) having an electric motor (4) and  
5 a drive shaft (6);  
      (b)   a bearing (26) mounted on the drive shaft (8) and  
      located radially eccentrically relative to the drive shaft  
      (8);  
      (c)   a second drive shaft (24) mounted on the eccentric  
10 bearing (26);  
      (d)   a carrier plate (16) mounted on the second drive  
      shaft (24) and  
      (e)   a platen (36) for mounting on the carrier plate  
      (16) characterised in that the carrier plate (16) is  
15 provided with a first engagement means (44) and the platen  
      is provided with second engagement means (54) to engage with  
      the first engagement means (44) by rotation of the platen  
      (36) relative to the carrier plate (16).
- 20 2     A powered oscillating hand tool according to claim 1,  
      characterised in that the first and second engagement means  
      together comprise a bayonet fitting.
- 3     A powered oscillating hand tool according to claim 2,  
25 characterised in that the first engagement means comprises  
      one or more apertures and the second engagement means  
      comprises one or more hook members.
- 4     A powered oscillating hand tool according to any of  
30 claims 1 to 3 which is a sander.
- 5     A powered oscillating hand tool substantially as herein  
      described and with reference to the accompanying drawings.

## ABSTRACT

A powered oscillating hand tool (10) comprises

5 (a) a drive unit (2) having an electric motor (4) and a drive shaft (6);

(b) a bearing (26) mounted on the drive shaft (8) and located radially eccentrically relative to the drive shaft (8);

10 (c) a second drive shaft (24) mounted on the eccentric bearing (26);

(d) a carrier plate (16) mounted on the second drive shaft (24) and

(e) a platen (36) for mounting on the carrier plate 15 (16). The carrier plate (16) is provided with a first engagement means (44) and the platen is provided with second engagement means (54) to engage with the first engagement means (44) by rotation of the platen (36) relative to the carrier plate (16).

20

The first and second engagement means together comprise a bayonet fitting.

25

30

35

1/2

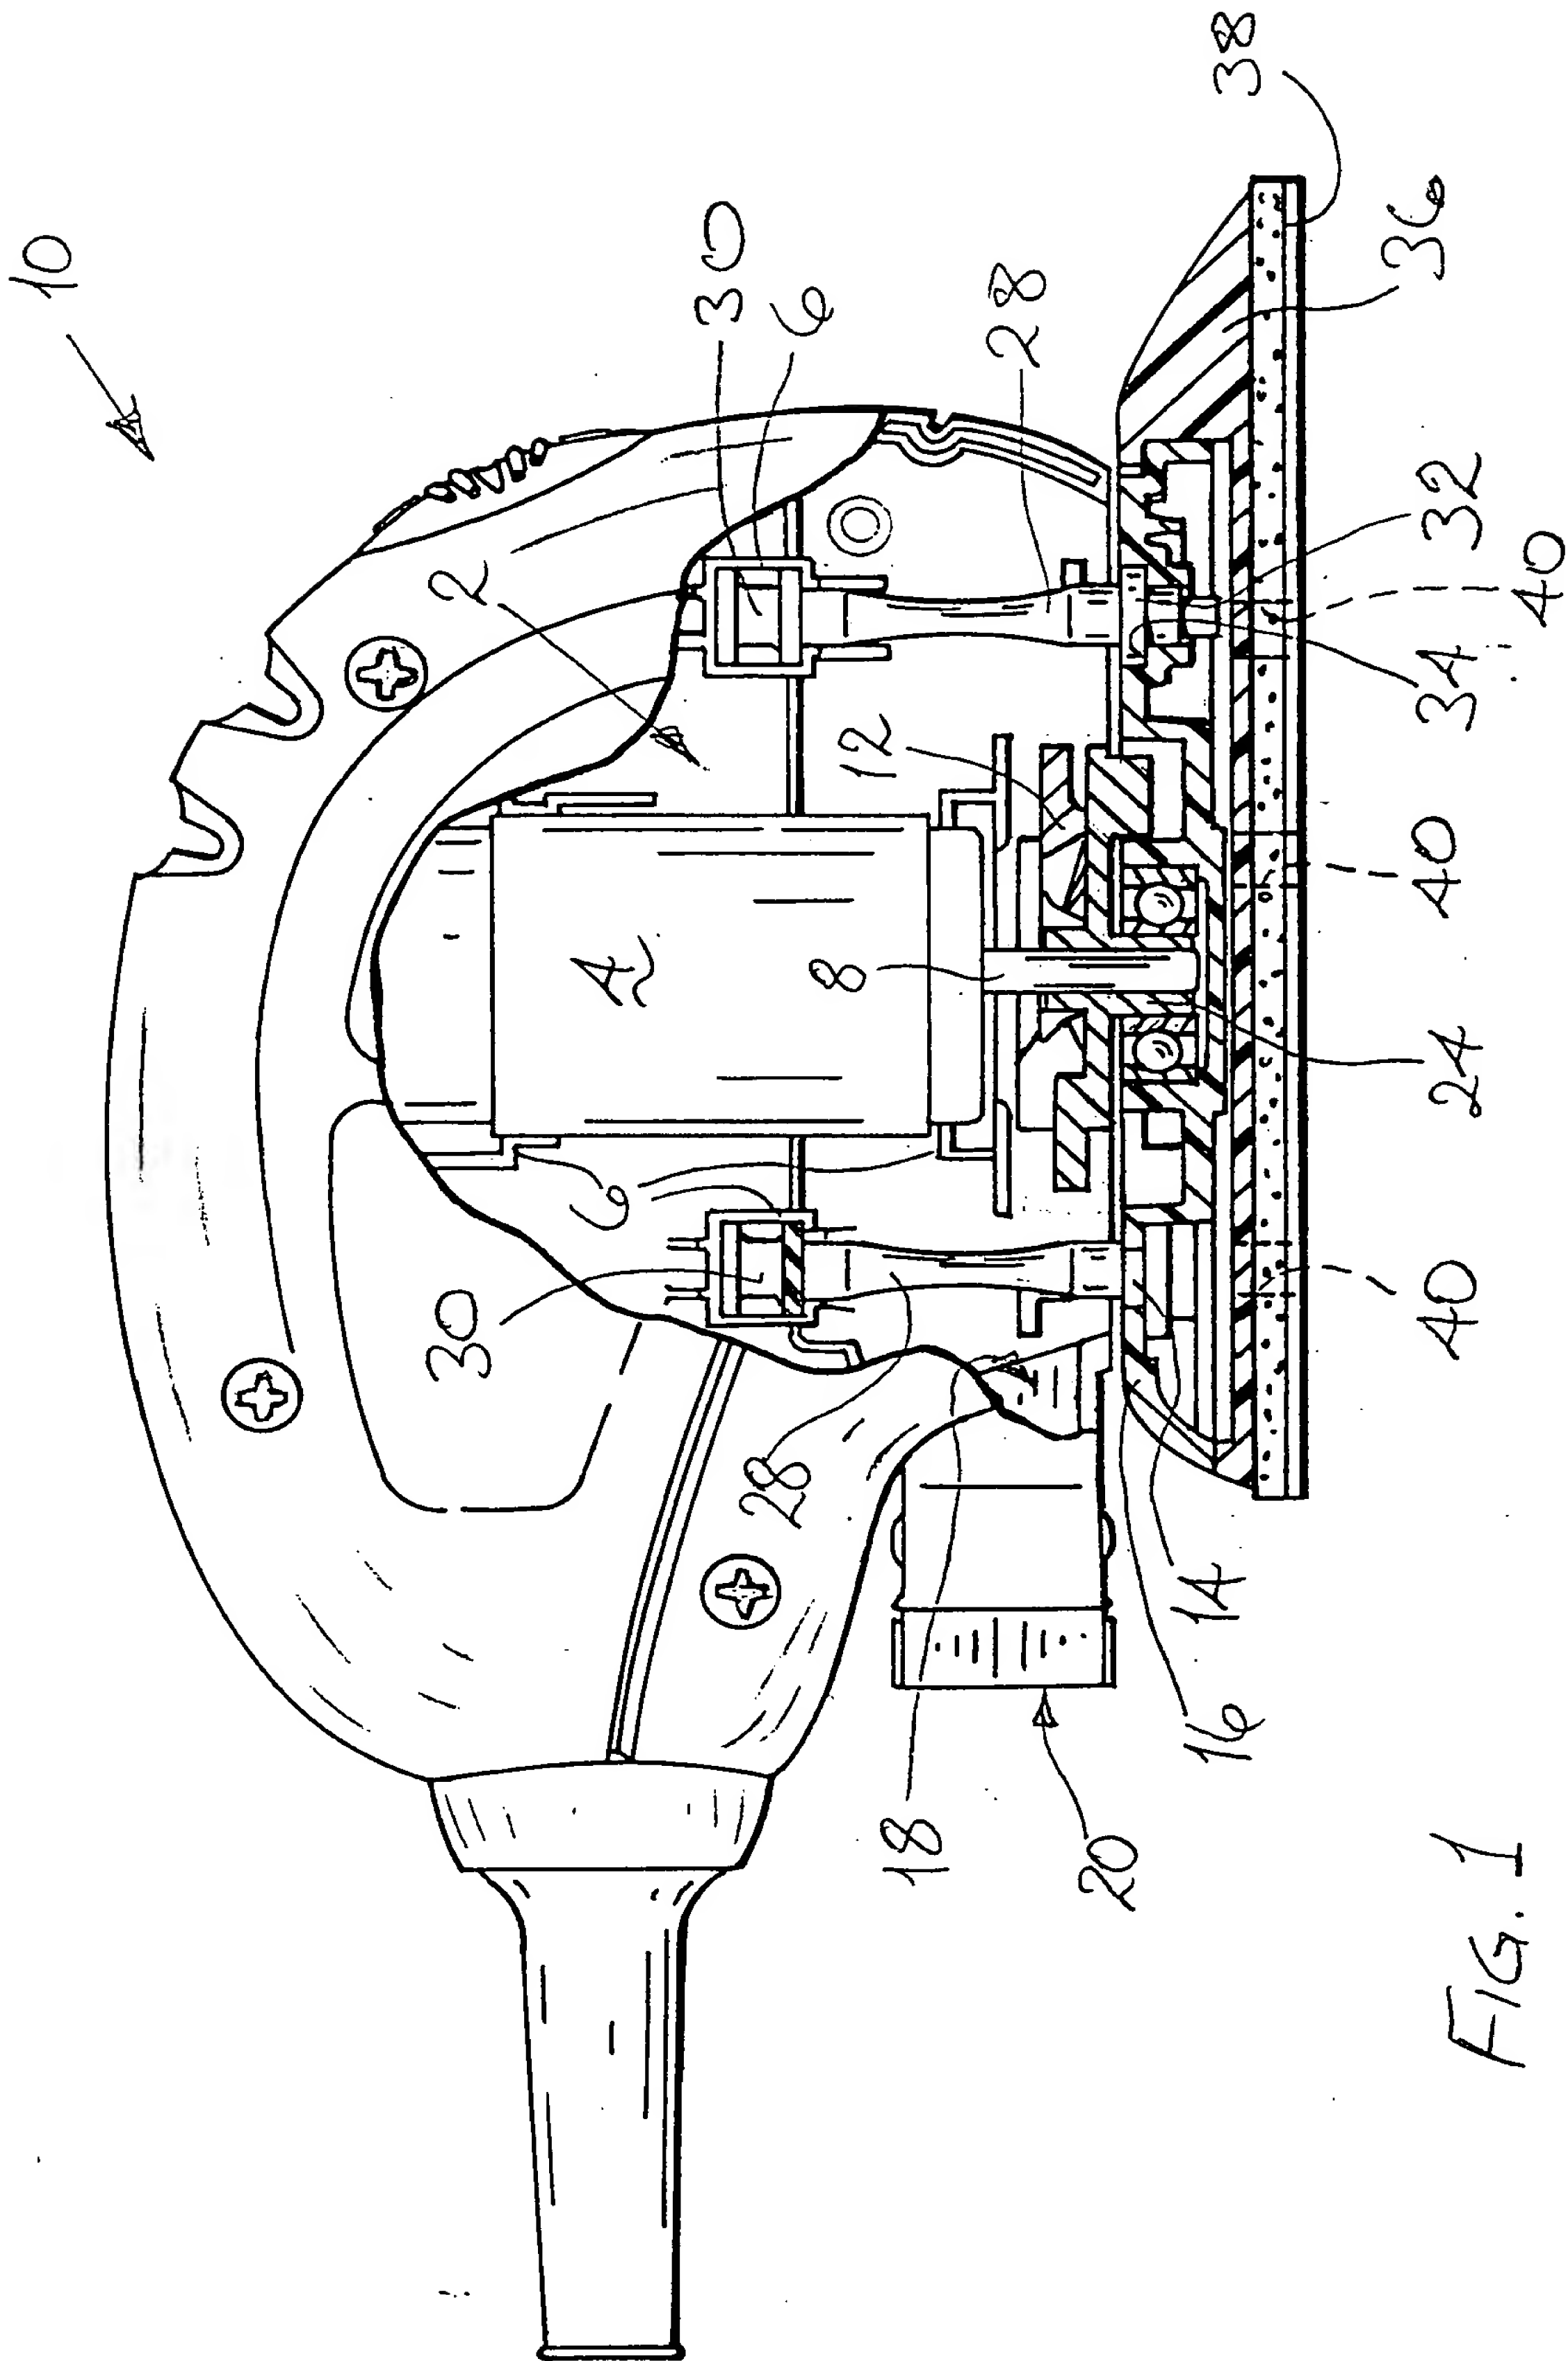


FIG. 1

